

APPLICATION:

JOB NAME:

PRODUCT NAME:


SS 8" C/C DECK FAUCET

\_\_\_\_\_ SPECIAL CONFIGURATION  
CHECK BASE MODEL AND OPTIONS


QUANTITY:

ITEM NO.

- MODEL:
- 57630 WITH 6" SWING SPOUT
  - 57649 WITH 8" SWING SPOUT
  - 57657 WITH 10" SWING SPOUT
  - 57665 WITH 12" SWING SPOUT
  - 57673 WITH 14" SWING SPOUT
  - 57681 WITH 16" SWING SPOUT

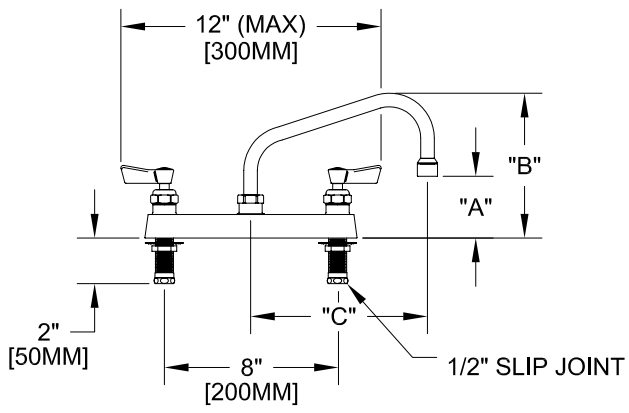


FOOTPRINT:

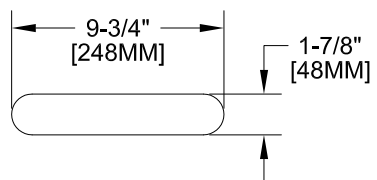

MODEL	DIM "A"	DIM "B"	DIM "C"
57630	2-3/8" [60MM]	6" [150MM]	6" [150MM]
57649	2-5/8" [66MM]	6-1/2" [165MM]	8" [200MM]
57657	3-1/4" [83MM]	7" [177MM]	10" [250MM]
57665	3-3/4" [98MM]	7-1/2" [188MM]	12" [300MM]
57673	4-5/8" [115MM]	8-3/8" [212MM]	14" [350MM]
57681	5-1/8" [131MM]	9" [228MM]	16" [400MM]

ROUGH-IN:

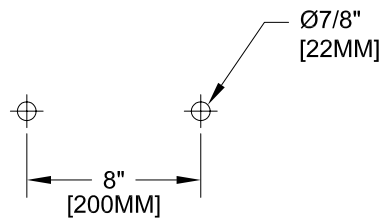

- OPTIONS OR MODIFICATIONS:
- SUPPLY LINES (24" OR 36") CIRCLE LENGTH
  - DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH
  - HANDLES (CROSS OR WRIST) CIRCLE STYLE
  - VANDAL RESISTANT KIT
  - OTHER \_\_\_\_\_

FEATURES

- CONTROL VALVE
- \* 8" DECK MOUNT
  - \* STAINLESS STEEL CONSTRUCTION
  - \* SWIVELLING SEAT DISKS
  - \* HOT SIDE STEM - RIGHT HAND
  - \* COLD SIDE STEM - LEFT HAND
  - \* LEVER HANDLES OR WRIST HANDLES
  - \* SWING SPOUT

- SYSTEM LIMITS
- \* TEMP: 40°F MIN. TO 140°F MAX.
  - \* PRESSURE: 200 PSI MAX. STATIC
  - \* 2.20 GPM AT 80 PSI

- SHIPPING WEIGHT
- \* 5.5 LBS
  - \* NSF 61-9 APPROVED & LISTED
  - www.truesdail.com

ANSI/A112.18.1M

**FISHER**  
FISHER MANUFACTURING COMPANY  
TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
information@fisher-mfg.com - www.fisher-mfg.com