

### Features

- Fixture-mount design.
- Includes 1.5 V AA batteries.

### Material

- Brass construction.

### Technology

- Electronic infrared sensor with WAVE technology for accurate activation.
- Slow-closing piston technology.

### Installation

- Intended for urinal installations with 3/4" spud coupling connection.

### Optional Accessories

GP1118986 Flushometer Extension Kit



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

ASSE 1037

DOE - Energy Policy Act 1992

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*


| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



CP

Polished Chrome

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

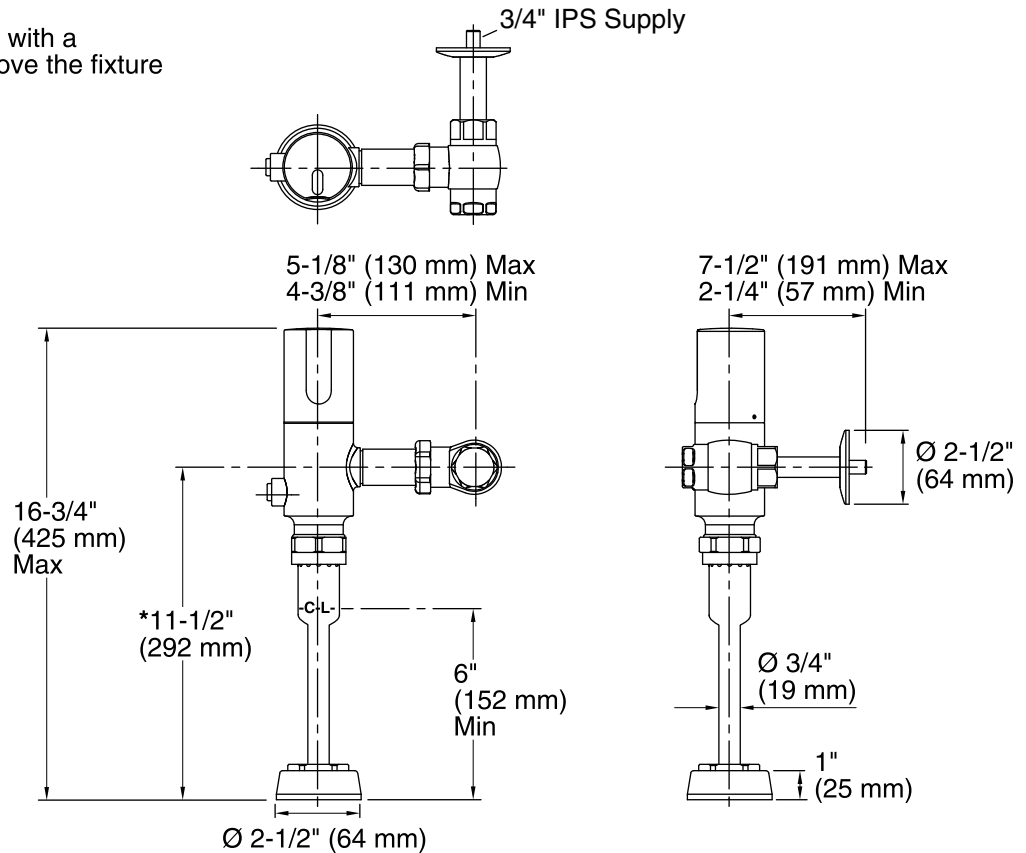

### Technical Information

All product dimensions are nominal.

### Pressure and Supply Requirements

Fixture flow rate min: 10 gpm (37.9 lpm)

Fixture pressure max 80 psi (551.6 kPa)

(static):

Power source: AA 1.5 V, included

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.