




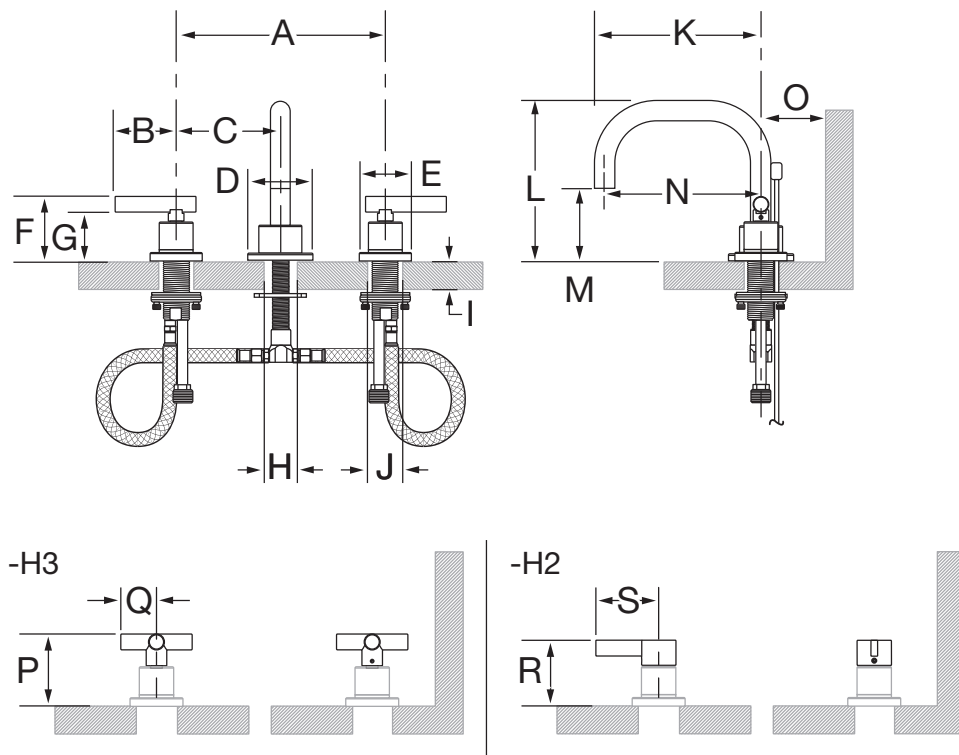
Location:

SLW-3522-1.5
Two Handle Widespread Lavatory Faucet
Specification Submittal



<p>Model Numbers</p>	<p>Specification</p>
<p><input type="checkbox"/> SLW-3522-1.5 <i>Dia Two Handle Widespread Lavatory Faucet</i></p>	<p>Two handle widespread lavatory faucet featuring an 8" to 16" mounting configuration. Includes ceramic cartridges, 1/2" IPS inlet connections, metal drain assembly and standard 1.5 gpm (5.7 L/min) aerator. Components made from brass and nonmetallic materials plated in standard polished chrome finish.</p> <p>(ADA compliant for lever and blade handle options only)</p>
<p>Modifications</p>	<p>Warranty</p>
<p><input type="checkbox"/> -H2 <i>Blade handles</i></p> <p><input type="checkbox"/> -H3 <i>Cross handles</i></p> <p>Note: Append appropriate -suffix to model number.</p>	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>
<p>Compliance</p> <p>-ASME A112.18.1/CSA B125.1 -NSF/ANSI 61.9, NSF/ANSI 372 -WaterSense 1.5 gpm (5.7 L/min)</p> 	

Dimensions



Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/8", 60 mm
C	Min. 4", 102 mm
D	2-1/2", 64 mm
E	2", 51 mm
F	2-1/2", 64 mm
G	1-7/8", 48 mm
H	Hole Size Min. Ø 1-1/2", 38 mm Max. Ø 1-5/8", 41 mm
I	Deck Thickness Ref. Max. 1-3/8", 35 mm
J	(2x) Hole size Min. Ø 1-1/8", 29 mm Max. Ø 1-1/2", 38 mm
K	6-3/8", 162 mm
L	5-3/4", 146 mm
M	2-5/8", 67 mm
N	6", 152 mm
O	1-1/2", 38 mm
P	2-3/4", 70 mm
Q	1-3/8", 35 mm
R	2-1/2", 64 mm
S	2-3/8", 60 mm

Note: Dimensions subject to change without notice.